



COMPACT LASER MODULES WITHOUT COMPROMISES
FOR INDUSTRIAL INTEGRATION AND SCIENTIFIC APPLICATIONS



KEY FEATURES:

- * Output powers up to 1W
- * High beam quality and stability
- * Broad selection of wavelengths; fine-tuneable
- * Modulation up to 1.5 MHz
- * Temperature-stabilized
- * Wavelength-stabilized systems available
- * Control Software Ltunes included
- * Fiber coupler & fibers available

Beam specifications

	Diode lasers	DPSS lasers
Beam diameter	1.1 x 2.2 to 1.2 x 4.3 mm	Round beam 1.2 mm
Divergence	< 1.2 mrad	
Beam mode	TEM00 (except multi-mode lasers)	
Polarization	Linear, > 100:1	Linear, >10:1
Beam alignment	< 5 mrad and < 0.1 mm (compared to base mount)	
Pointing stability	< 5 µrad/K	
Noise	< 2 % RMS	
Power stability	< 1 % (10h)	< 3 % (8h)
Temp. accuracy	< 10 mK	
Warm-up time	Ready for use after 5s, calibrated operation after 5 min	
Drive mode	Active current control	Active power control
Modulation	Adjustable constant power; analog or digital external modulation up to 1.5 MHz	Constant nominal power; switchable up to 1 kHz*3
Control modes	Power, temperature and modulation mode via USB, optical remote control available	Power and modulation mode via USB

The actual emission wavelength may deviate from the specified wavelength by up to ± 5 nm (± 1 nm on request). It depends on the actual output power and can be fine-tuned by adjusting the temperature (except DPSS lasers).

General specifications

CDHR classification	3b, 4 (for laser output > 500 mW)
Dimensions	63.5 x 31.0 x 32.5 mm (technical drawing available on our website)
Weight	94 g (laser head)
Operating temp.	0 °C to 45 °C (non condensing)
Storage temp.	-25 °C to 70 °C

*1 Multi-mode

*2 Water cooler recommended

*3 Acusto-optical modulator recommended for stable and faster modulation

Type	Wavelength	Maximum output power mW
Diode	375 nm	70, 200*1, 700*1*2
Diode	380 nm	175*1*2
Diode	395 nm	120, 200
Diode	405 nm	40, 75, 125, 175, 200, 300*2, 500*1*2,
Diode	415 nm	50, 120
Diode	420 nm	50
Diode	422 nm	120
Diode	425 nm	50
Diode	430 nm	50
Diode	435 nm	50
Diode	440 nm	50
Diode	445 nm	50, 100, 500*1*2, 1000*1*2
Diode	450 nm	75, 1000*1*2
Diode	455 nm	100
Diode	470 nm	50
Diode	473 nm	100, 225, 900*1*2
Diode	488 nm	50, 100, 200
Diode	495 nm	75
Diode	505 nm	75
Diode	510 nm	75
Diode	515 nm	25, 75, 150
Diode	520 nm	50, 80, 120, 500*1*2
DPSS	532 nm	75, 100, 125, 175, 200
DPSS	532 nm	125, 175, 200 narrow line NL
Diode	633 nm	75
Diode	635 nm	75, 125
Diode	638 nm	75, 125, 175, 250*1*2, 500*1*2
Diode	642 nm	75, 150
Diode	648 nm	150
Diode	650 nm	250*1
Diode	660 nm	75, 120, 200
Diode	670 nm	15
Diode	685 nm	40
Diode	690 nm	30, 200
Diode	705 nm	40
Diode	730 nm	40
Diode	760 nm	10
Diode	780 nm	50
Diode	785 nm	100, 200, 300*2, 400*2
Diode	795 nm	200
Diode	805 nm	500*1*2
Diode	808 nm	75, 150, 1000*1*2
Diode	820 nm	100
Diode	825 nm	200
Diode	830 nm	45, 75, 125, 225, 1000*1*2
Diode	840 nm	50, 175
Diode	850 nm	250
Diode	852 nm	75, 125, 300, 600
Diode	880 nm	10
Diode	905 nm	10, 175
Diode	915 nm	75, 125, 175, 250*2, 1000*1*2
Diode	940 nm	75, 125, 175, 200*1, 250*2
Diode	960 nm	250
Diode	980 nm	75, 125, 175, 250, 1000*1*2
Diode	995 nm	5
Diode	1030 nm	100
Diode	1064 nm	125, 175, 300*2, 400, 450*2, 1000*1*2
Diode	1085 nm	75
Diode	1550 nm	10, 175

Laser Controller

The Lambda Beam laser head requires a laser controller to provide power and control all operating parameters. For scientific applications and prototyping we recommend using our PowerController. For industrial integration we also offer the highly compact PowerBox to be directly attached to the laser head or connected via a customized cable. The 532 nm DPSS laser is only available with the PowerBox.

Power Controller



Modulation input	analog and digital 0 - 5 V DC
Modulation	up to 0.5 MHz
Digital interface	USB*1 (RS-232 optional)
Further control inputs	Interlock, key switch, modulation mode switch
Cable length	79 cm (default)
Power consumption	11 V DC, up to 2A (depending on laser output power)
AC adapter (included)	99 - 240 V AC, 50 - 60 Hz
Dimensions	85.0 x 85.0 x 32.5 mm (technical drawing available)
Weight	416 g

Powerbox




Modulation input	analog and digital 0 - 5 V DC
Modulation	up to 1.5 MHz
Digital interface	USB*1 (RS-232 optional)
Further control inputs	Interlock
Power consumption	12 - 36 V DC, up to 2A (depending on laser output power)
Dimensions	39.0 x 39.0 x 32.5 mm (technical drawing available)
Weight	69 g

For more details, please see the PowerBox data sheet


*1 Digital connection is not required for operation

Options and accessories

- Opto-mechanical shutter
- Diode wavelength selection
- Water cooling base plate
- Heatsink labor kit
- Cooling Ice kit
- RS-232 interface
- Fiber coupler
- Fibers

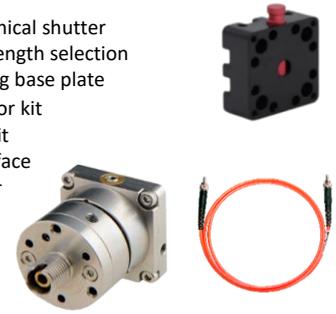


Ltune control software

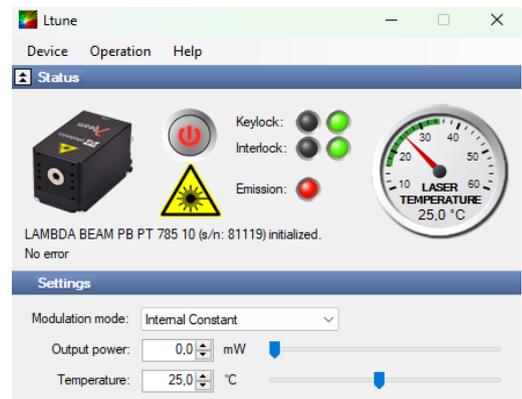

All operating parameters can be monitored and controlled from a PC using the Ltune laser control software for Windows. Alternatively, the laser can easily be controlled from your own application software. Please refer to the user manual for a detailed description of the communication protocol. You can find downloads on our website

Typical emission spectrum

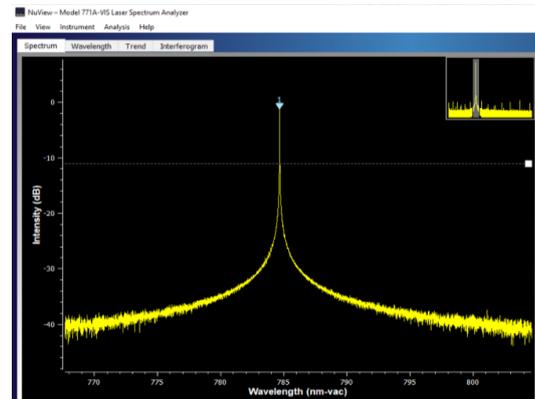

Ask us for further technical specifications and test reports

Please contact us if your requirements are not matched by these specifications. Custom modifications are available for any quantities. All specifications are subject to change without notice. The latest versions can be found on our website.

01/2025 V4.0